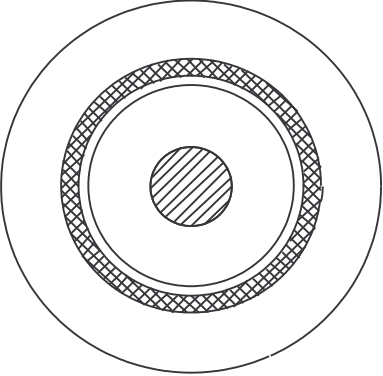



**Nízkoútlumový vf koaxiální kabel CFD240
- technická specifikace -**

Cable Type		CFD240
Profile		View
		
Conductor	Qty Material Size No./mm	One Bare Copper Wire 1/1.42
Dielectric	Material O.D.	PEF (NOM.) 3.81 mm
Shield	Binder	Sealed Aluminum Mylar Aluminum Tape
	Braid	Tinned Copper Wire (>78% coverage)
Jacket	Material O.D.	Polyethylene (PE) / PVC 6.1 mm
Minimum Bend Radius		19,1 mm
Nominal Impedance		50 ohms
Velocity of Propagation		84%
Capacitance		24.2 (pF/ft)
O.D. (in mm)	Inner Conductor	1.42
	Outer Conductor	4.25
Attenuation	MHz	dB/m
	5800 (measured)	0.668
	2400 (measured)	0.540
	1500	0.424
	900	0.326
	450 (70 cm band)	0.228
	220	0.159
	150 (2 m band)	0.130
	50	0.075
30	0.058	